



PRODUCT NAME

# EXCELLENT SELECTION CERTIFIED PELLETS

Ø 6mm

PURPOSE

Pellets are a wood fuel designed to be burned in modern pellet boilers and pellet fireplaces.

INGREDIENTS

Selected, extremely clean and dry pine sawdust.

PRODUCT CHARACTERISTICS

The highest standard of green heat.

Highly calorific – approximately 5.3 kWh per kilogram of pellets.

Guaranteed best and reproducible quality.

Low ash remaining after pellet combustion < 0.35%.

Eco-friendly (the ash produced after burning the pellets can be used as fertiliser for the lawn or garden).

“Zero CO<sub>2</sub> emissions” – the amount of CO<sub>2</sub> produced when the pellets are burnt is equal to the amount of CO<sub>2</sub> that growing plants take up during the photosynthesis process.

Contain no harmful substances.

Do not emit offensive or unpleasant odours.

Easy and practical to use.

TECHNICAL PARAMETERS

|   |                                  |
|---|----------------------------------|
| Total moisture content                          | < 8%                             |
| Ash content                                     | < 0.35%                          |
| Calorific value                                 | > 18 MJ/kg                       |
| Bulk density                                    | 600 < BD < 750 kg/m <sup>3</sup> |
| Fine fraction content (dust content in the bag) | ≤ 0.3%                           |
| Mechanical strength                             | > 98.5%                          |
| Diameter  | 6 mm                             |
| Length  | 3.15 < L < 40 mm                 |



## CERTIFICATES

EN Plus A1 No. PL 303

EN Plus A1 No. PL 027




## LOGISTICS STANDARD FOR PELLETS

|                                   |                                    |
|-----------------------------------|------------------------------------|
| Unit weight                       | 15 kg                              |
| Pallet dimensions                 | 100 cm x 120 cm lub 90 cm x 110 cm |
| Number of bags per layer [pcs]    | 5                                  |
| Number of layers                  | 13                                 |
| Number of bags per pallet [pcs]   | 65                                 |
| Product weight per pallet [kg]    | 975                                |
| Type of protection for the pallet | film hood and stretch hood         |


## PACKAGING

**Collective packaging**  
65 x 15 kg bags of pellets

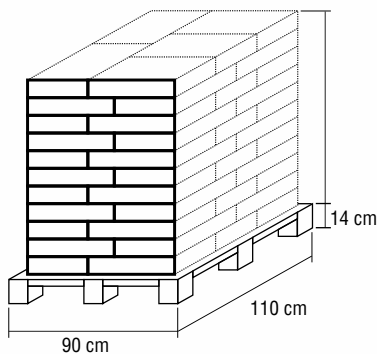


The bags are stacked on a pallet

**BIG BAG packaging**  
weight 1000 kg



On request, pellets in BIG BAGS can be packed on a 100 cm x 120 cm pallet

**Bulk transport**  
up to 24 tons



Tanker



Tipper



Walking floor



Tarpaulin

## TRANSPORT

Pellets should be transported by covered wheeled means of transport. The stacking and securing of the load should comply with the transport regulations for wheeled transport. Small groupage deliveries from as little as one pallet. Full-vehicle deliveries by tarpaulin, tank, tipper and walking floor trailers – 24 tonnes.

## STORAGE

We recommend storing the pellets in 15 kg bags in premises meeting the following conditions:

- roofed building with ventilation,
- in a dry place and not directly exposed to the elements,
- pellet sacks should be insulated from the ground by being stored on pallets,
- pallets in 15 kg bags can be stored one pallet on top of another – maximum of two layers,  
If this is the case, we recommend the use of spacers (wood-based panels). The best solution is to stack the pellets in layers on special storage racks.
- BIG BAG and bulk pellets must be stored in a storage area under the conditions described above.

**Storage of pellets in 15 kg bags and BIG BAGS in conditions other than those described above may cause damage to the pellets, for which Biomasa Partner Group is not responsible.**

MANUFACTURER

**BIOMASA**<sup>®</sup>  
PARTNER GROUP

[www.biomasapartner.pl](http://www.biomasapartner.pl)

CONTACT US

Tel. +48 530 921 166

E-mail: [pellet@biomasapartner.pl](mailto:pellet@biomasapartner.pl)

100% WOOD